

LED Downlight DTTL Datasheet



- COB LED,
- Luminaire 100-120 lm/Watt @ CRI80
- CRI>80, for 2700K, 3000K, 4000K 5000k
- Brushed aluminum body with good heat dissipation
- Low thermal resistance,
- BOKE no flicker drive
- Very even light distribution, high uniformity and no glare
- Instant switch-on regardless of temperature or humidity
- Suitable for various stores, art gallery, showcase, etc.


Product Spec:

Product Code	Dimension [mm]	Power [W]	Input Voltage[V]	Efficiency [lm/w]	CRI	Color Temp[k]
AL-DTTL-10W	D90XH90mm	10W	AC220-240V	100-120lm	>80/90	3000-6000K
AL-DTTL-17W	D110XH120mm	17W	AC220-240V	100-120lm	>80/90	3000-6000K
AL-DTTL-25W	D130XH135mm	25W	AC220-240V	100-120lm	>80/90	3000-6000K
AL-DTTL-35W	D170XH185mm	35W	AC220-240V	100-120lm	>80/90	3000-6000K
AL-DTTL-45W	D195XH195mm	45W	AC220-240V	100-120lm	>80/90	3000-6000K


Other Technical Data:

Beam angle	20/45°
UGR	< 25
Macadam	< 3 steps
SDCM	< 5
THD	< 15%
PF	> 0.95
LED driver	BOKE
Dimming	NOC -
IP rate	IP44
Working temp.	-20℃ - +45℃
Lifespan	50,000 hours
Warranty	5 years


Spectrum Distribution

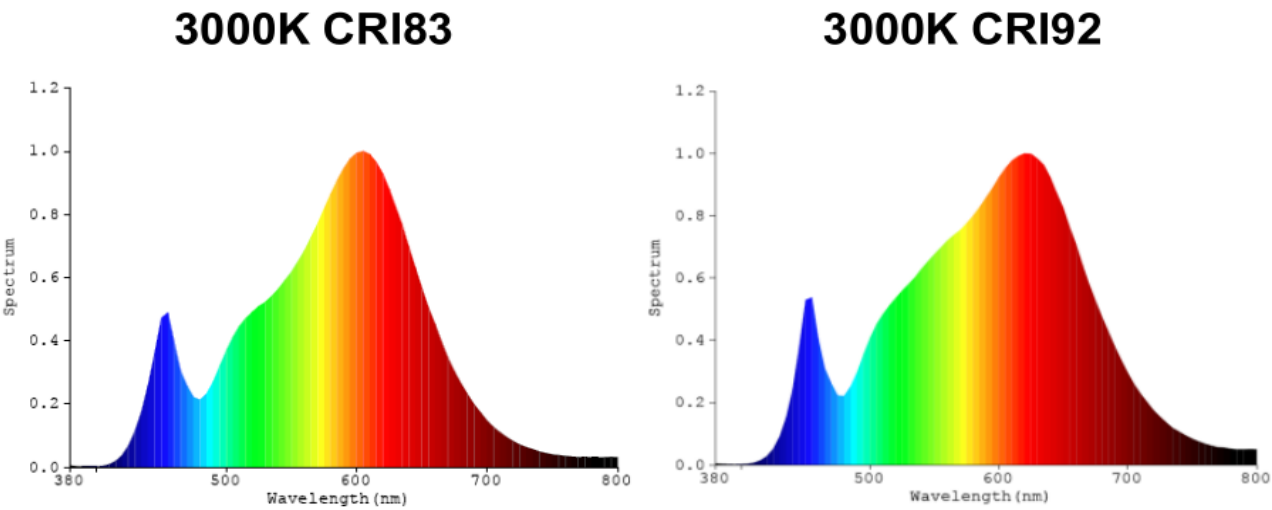

4000K CRI83

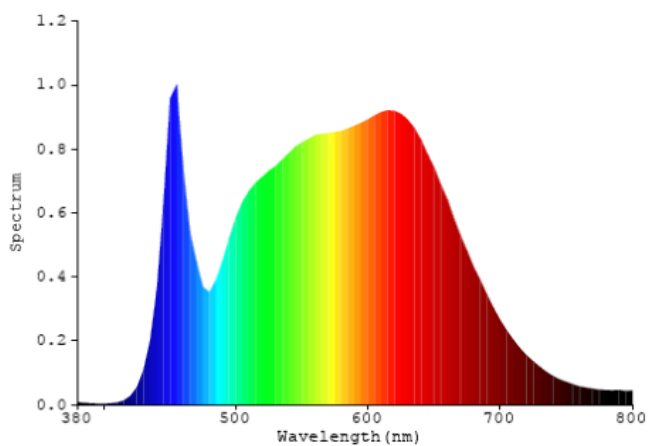

4000K CRI92

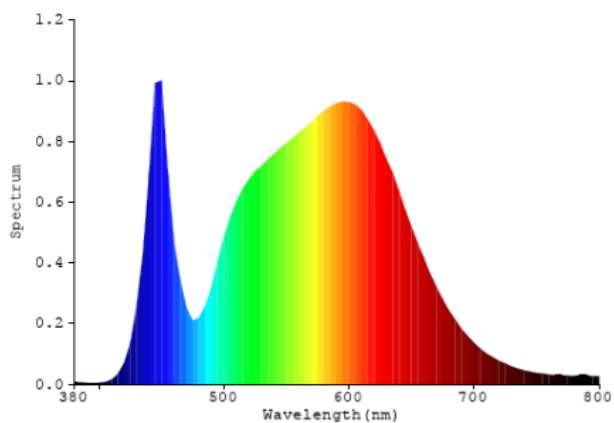

Package Details:

